




STAFFORD SOIMA TOWER CRANES

SGT 3610TL

Data Sheet / Catalogo / Fiche Technique / Scheda Dati / Dentenblatt / техническая спецификация
Metric / Métrico / Métrique / Metrico / Metrisch / метрика

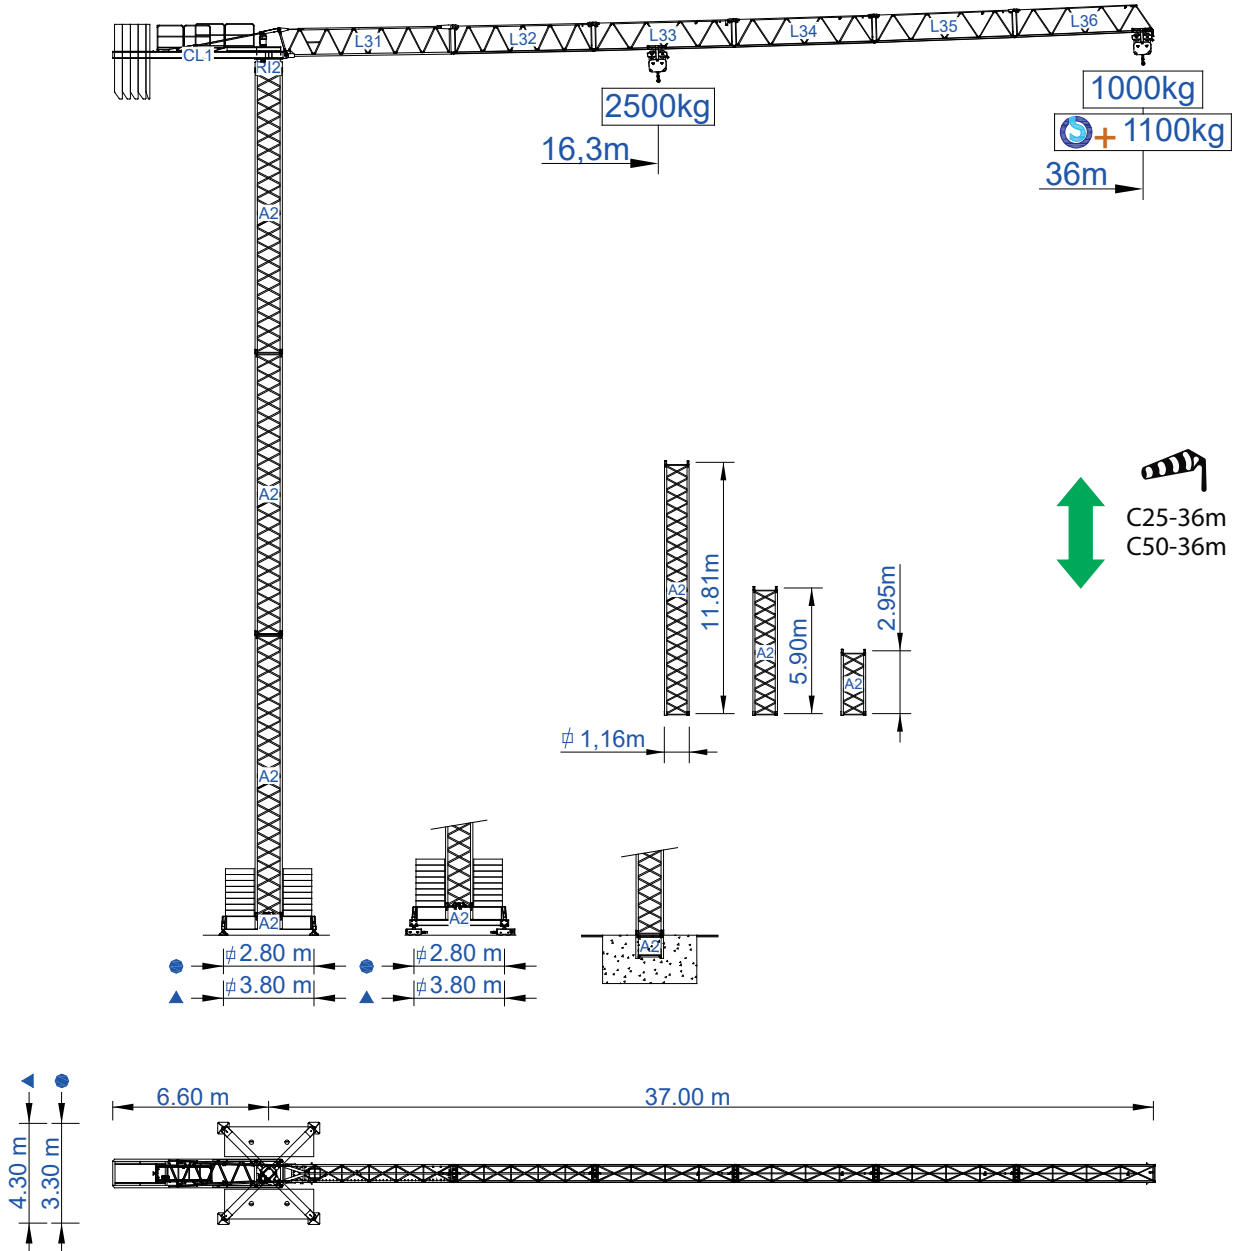

Headquarters

3620 S. 40th Street, Phoenix, AZ, 85040 USA
+1 (480) 993 3302


Factory




Zona Industrial de Canas de Senhorim - EN 234, 3525-040 Canas de Senhorim - Portugal
+351 232 673 530 info@staffordsoima.com

www.staffordsoima.com










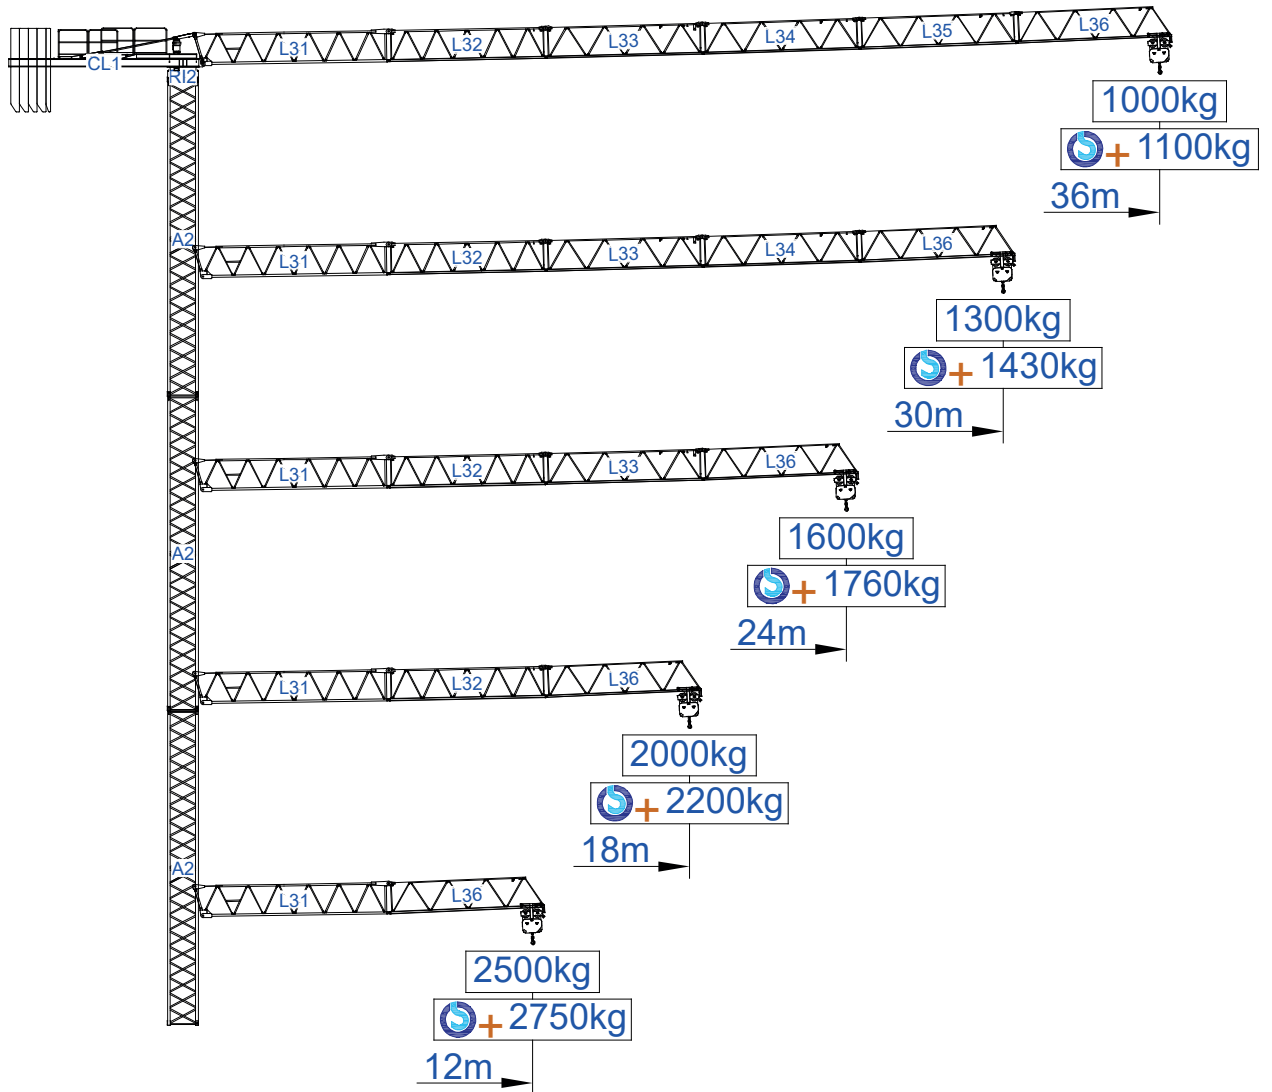













Empresa certificada no âmbito da Conceção, Fabrico e Serviço Pós-venda de Gruas Soima e componentes











m	 		2500kg					m
			12	18	24	30	36	
36	9000kg 4x2000kg + 1x1000kg	16,4	2500	2250	1630	1250	1000	kg
30	8000kg 4x2000kg	16,9	2500	2330	1690	1300		
24	6000kg 3x2000kg	16,1	2500	2220	1600			
18	4000kg 2x2000kg	14,7	2500	2000				
12	3000kg 1x2000kg + 1x1000kg	12,0	2500					
		m						


 **SOIMA PLUS**


m	 		2500kg					m
			12	18	24	30	36	
36	9000kg 4x2000kg + 1x1000kg	16,4	2500	2480	1790	1380	1100	kg
30	8000kg 4x2000kg	16,9	2500	2500	1860	1430		
24	6000kg 3x2000kg	16,1	2500	2440	1760			
18	4000kg 2x2000kg	14,7	2500	2200				
12	3000kg 1x2000kg + 1x1000kg	12,0	2500					
		m						

			A (mm)	B (mm)	C (mm)	kg (±5%)	
Jib / Lança / Fleche / Braccio		L31	7470	800	1650	1560	
/ Ausleger / кливер		L32	6075	760	1220	385	
		L33	6055	760	1210	350	
		L34	6040	760	1200	275	
		L35	6030	760	1190	250	
		L36	5900	760	1400	240	
	Head turntable		CL1 RI2	7380	1200	1530	2450
Counterweight / Contrapeso / Contrepoids / Gegengewicht / Противовес		CP2	1160	330	3140	4x2000 8000	
		CP3	1160	165	3140	1000	
Tower section / torre / Coupe tour / Sezione torre / Turmabschnitt / Секция башни		A2	11985	1180	1180	1950	
		A2	6075	1180	1180	1030	
		A2	3120	1180	1180	560	
Climbing tower section		A2	3120	1385	1380	620	
Foundation anchor / Tramo encastrar /		A2	1170	1160	1160	250	
Base Chassis		A2	5525	430	720	750	
			2720	250	720	2x400 800	
						TOTAL	1550
Base Chassis		A2s	4135	430	720	600	
			2025	250	720	2x350 700	
						TOTAL	1300



	
	0 a 1 r.p.m. / 3 daN.m
	0 a 50 m/min / 1,5 kVA
	15 m/min / 2x2 kW

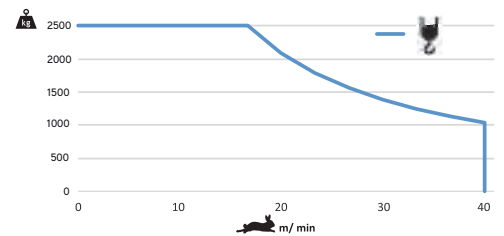	
	0 a 53 m/min / 11kW




	20 kVA / 400 V +- 5% (50/60 Hz)
---	---------------------------------

Max height of hoist

 (H)Max. 88m + 

Transport / Transporte / Transport / Trasporto / Transport / Транспорт

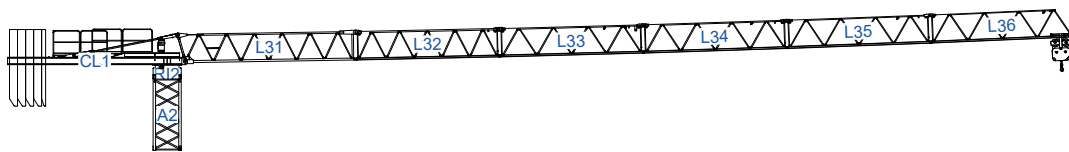



 C25

2x




/

2x



 36m

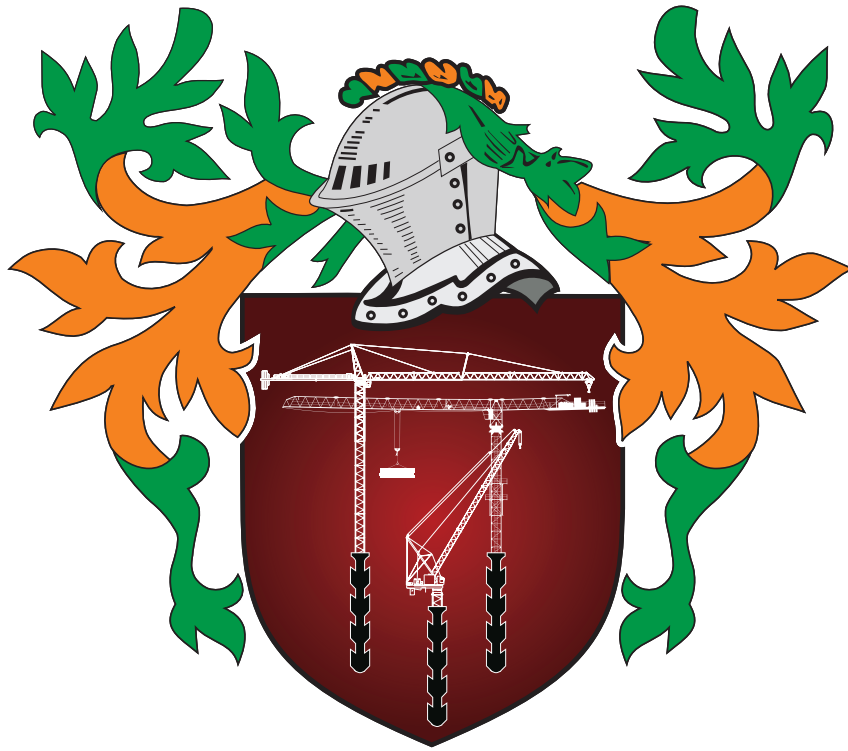


STAFFORD SOIMA

TOWER CRANES

STAFFORD SOIMA, SA

Headquarters

 3620 S. 40th Street , Phoenix , AZ, 85040 USA

 +1 (480) 993 3302

Factory

 Zona Industrial de Canas de Senhorim - EN 234, 3525-040 Canas de Senhorim - Portugal

 +351 232 673 530  info@staffordsoima.com

 staffordsoima.com